




PORTAL PLUS[®]

P R O V E N T H E B E S T

entrancematt^{ing}

Portal Plus Clean-Off-Zone effectively stops walked-in dirt and water:

- saves up to 65% in cleaning costs
- reduces dust levels by 80% which improves indoor air quality
- meets highest stringent Fire Ratings of the Building Code of Australia
- satisfies Health & Safety requirements
- reduces noise levels by 32dB
- has a stylish appearance

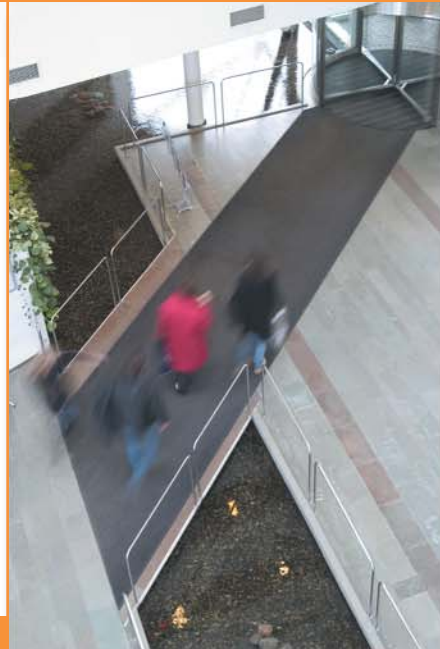

quality
innovation
experience
service

SPECTRUM

The exclusive use of coarse nylon yarns for Portal Plus provides an extra brush effect. Therefore an optimum dirt collection can be achieved. Dirt and moisture are absorbed in the pile of Portal Plus. Portal Plus is installed in places where the foot traffic moves from dirty to clean areas. For example in entrances, between kitchen and restaurant, factory and office, in front of drinks machines and so on.

The Portal Plus yarn is:

- 100% polyamid/nylon
- permanent anti-static
- BCF (Bulked continuous filament)
- no loss of pile with intensive cleaning
- Tetra-lobal shaped
- better resiliency and moisture absorption.

The advantages of the pile density of Protect Super Clean-Off-Zone:

- maximum friction
- optimum collection of dirt
- no building of traffic lanes
- optimum colour fastness

Available sizes

Portal Plus is available in rolls. The length is app. 25 m and width 200 cm.(excluding a 2cm vinyl edge). These measurements are approximate.



Portal Plus Clean-Off-Zone grant a 5-year wear guarantee, subject to correct installation and maintenance.



Loose laid to AS1428.1 (Design for Access and Mobility)

The mats exposed edges should be fastened with trims (eg Spectrum Gripfit)

Adhered - Portal Plus

In frequently used areas the product should be adhered. For suitable adhesives check with the manufacturers. The subfloor must be dry, smooth and stable. Adhesion must be carried out in accordance with instructions of the adhesive manufacturer.

Complimentary technical advice, maintenance and sample service available for personal service call 1800 888 256.

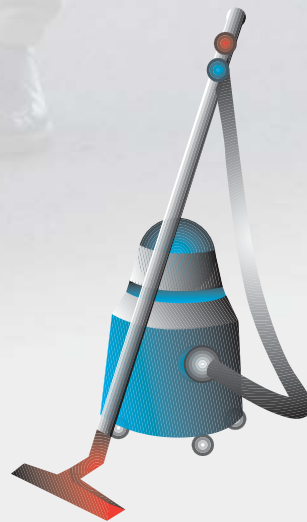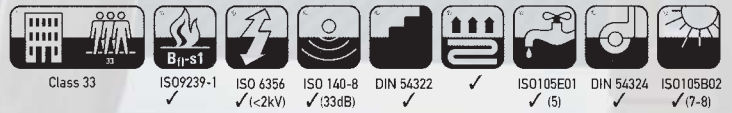

5Kg m²



6Ltr m²

Technical Data

Product
 Method of manufacture
 Pile material
 Primary backing
 Secondary backing
 Water absorption
 Soil absorption

Portal Plus
 tufted 5/32° cut pile
 100% BCF polyamide
 non woven polyester
 Comfort™ vinyl
 Approx 5 litre/m²
 Approx 6kg/m²

Technical Data

Wear classification	Intensive
Total mass	ISO 8543 ± 3.820 g/m ²
Effective pile mass	ISO 8543 ± 700 g/m ²
Thickness total	ISO 1765 ± 9mm
Thickness pile	ISO 1766 ± 6.9mm
Installation depth	8mm
Static charge	ISO 6256 < 2kv

Application

Over 75% of dirt in a building is walked-in from outside. Portal Plus provides a strong barrier to dirt, resulting in cleaner buildings and significant cleaning and maintenance cost savings over the lifetime of your floors. Portal Plus is suitable for commercial applications such as schools, offices and healthcare buildings.



393 South Road,
 Mile End South Australia 5031
 T: +61 (08) 8354 9000 • F: +61 (08) 8354 9045
 E: 393@spectrumfloors.com.au
 www.spectrumfloors.com.au



This information is correct at time of printing 06/10 but the manufacturer reserves the right to carry out modifications aimed at product improvement without notice. NOTE: Due to manufacturing limitations there may be variations between colours of actual flooring and the samples shown in this brochure. © Spectrum Floors 2010. **The manufacturer reserves the right to modify the specifications aimed at product improvement at any time.**