

Premium Office Solutions




# SPECTRUM RUBBER FLOORING STUDDED

Value Engineered  
Flooring Systems

[spectrumfloors.com.au](http://spectrumfloors.com.au)  
Phone : 1300 786 585  
Email : [admin@spectrumfloors.com.au](mailto:admin@spectrumfloors.com.au)

 **spectrum**  
quality commercial flooring

BRISBANE | SYDNEY | MELBOURNE | HOBART | ADELAIDE | PERTH

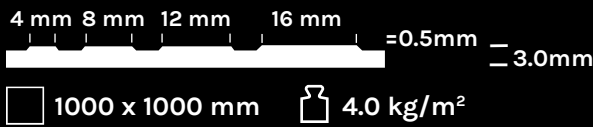

## TECH DATA

### 2 - 4mm Rubber Flooring



CHARACTERISTICS	REQUIREMENTS	ZERO.4	CLASSIC	STRONG
WEIGHT		4.9 kg/m <sup>2</sup>	3.8 kg/m <sup>2</sup>	5.2 kg/m <sup>2</sup>
ROLL SIZE		1000 x 1000 mm	500 x 500 mm	1000 x 1000 mm
THICKNESS		3 mm	2.7 mm	4 mm
HARDNESS ISO 7619	≤ 75	90 ± 5 Shore A		
RESIDUAL INDENTION EN 433	≤ 0.15 ≤ 0.20 ≤ 0.25	- 0.10	0.08 -	0.12 mm -
ABRASION RESISTANCE ISO 4649 (Met. A-5N)	≤ 250	140 mm <sup>3</sup>		
DIMENSIONAL STABILITY EN 434	± 0.40 max	± 0.30 %		
FLEXIBILITY EN 435 Met. A (Ø 20 MM)	NO FISSURING	COMPLY		
COLOR FASTNESS TO ARTIFICIAL LIGHT ISO 105-B02 Met. 3	≥ 6 blue scale, ≥ 3 gray scale	COMPLY		
CIGARETTE BURN EN 1399	Met. A ≥ 4 Met. B ≥ 3	COMPLY		
FIRE RESISTANCE AS/ISO 9239-1	COMPLY	MEETS ALL BCA - NCC REQUIREMENTS		
SLIP RESISTANCE AS4586-1999		> 0.30		
STAIN RESISTANCE AS458619999		RESISTANT		
ELECTROSTATIC CHARGE EN 1815		≤ 2 kV		
REDUCTION OF SOUND TREADING ISO 10140-3		8 dB (approx.)		10 dB (approx.)
CASTOR CHAIRS EN 425		Suitable for Wheel castors "W" as stated in EN STANDARD 12529 2 pack adhesive is strongly recommended in high stress areas.		
ELECTRICAL BEHAVIOR EN 1081 Met. A				≤ 10 <sub>9</sub>


## Installation

Correct installation is an important part of a successful project. To facilitate the installation the underside of the flooring is sanded. All products should be installed in accordance with BS 8203-2001 and good trade practice. Detailed laying instructions and water based non toxic adhesive recommendations are available on request.


## Maintenance

Easy maintenance using environmentally safe materials to high European standards should be performed dependent on site conditions. Detailed cleaning instructions are available for each product on request.

**B207Z**

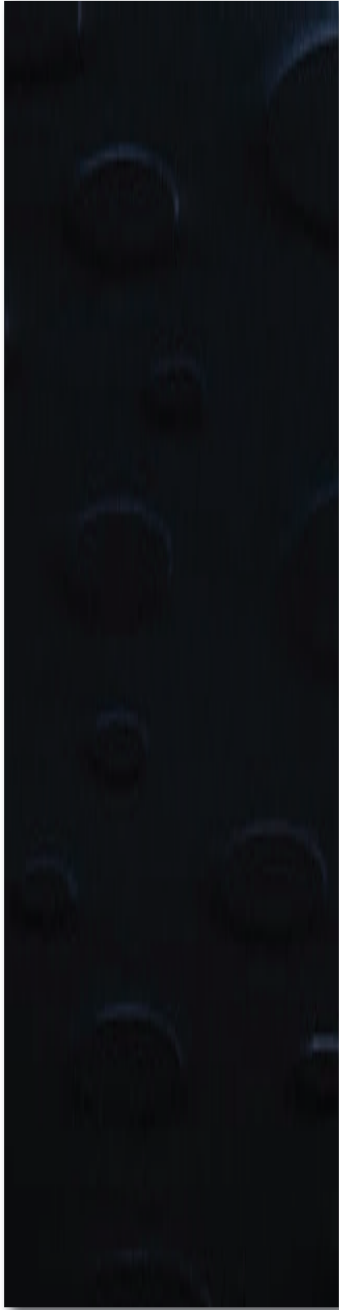


**G 804 Gray**

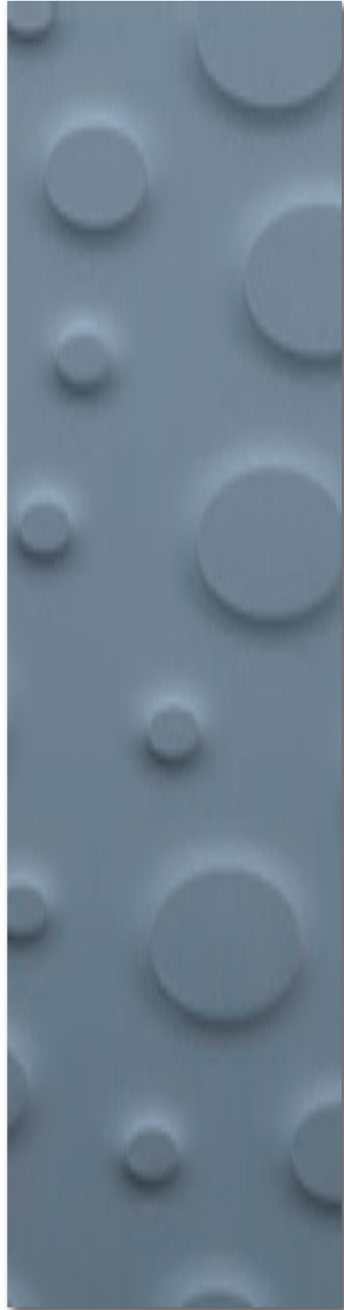

**922 Red**



**960 Maroon**

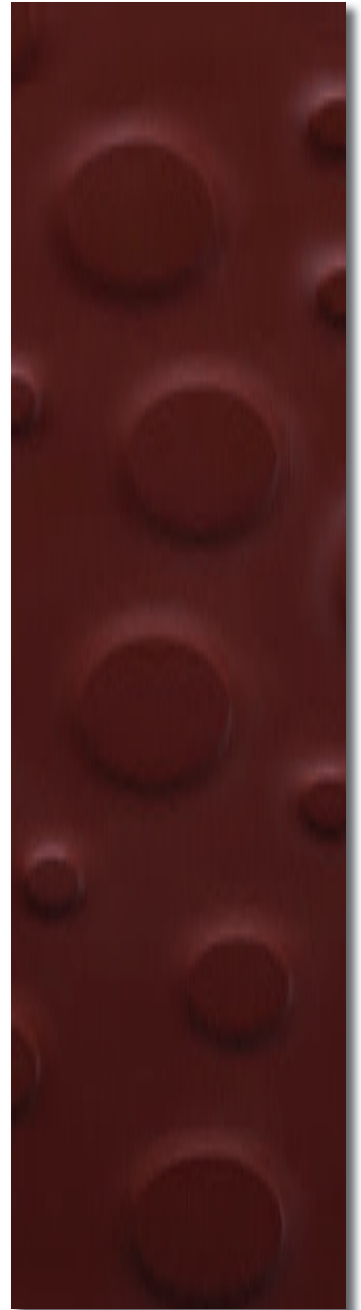


**507 Helios**



**510 Orange**




**922 Cherry**

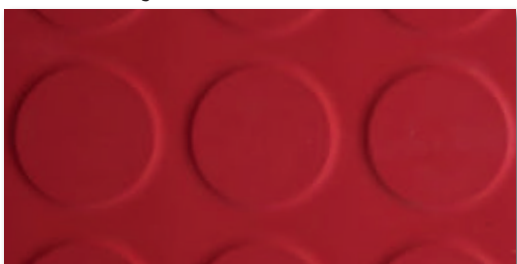

**700 Sage**



123 Choco

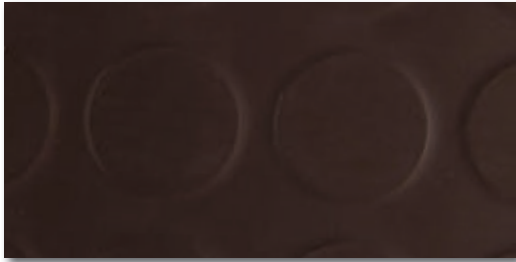

709 Mint



804 Metal



820 Pearl



265 Steel



811 Silver



264 Cloud



805 Eiffel




207 Jeans




847 Slate



206 Capri

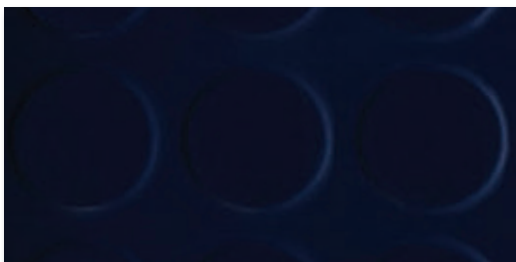

004 Carbon

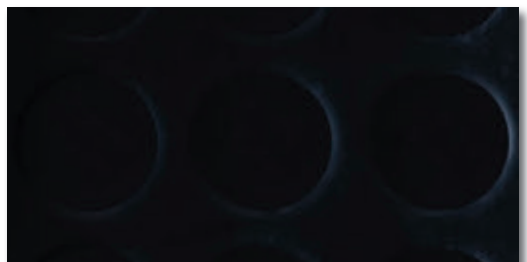



For more information visit  
[spectrumfloors.com.au](https://spectrumfloors.com.au)

Head Office and Dispatch Center  
8 Selgar Avenue,  
TONSLEY South Australia 5042

Phone : 1300 786 585

Email : [admin@spectrumfloors.com.au](mailto:admin@spectrumfloors.com.au)



© Copyright September 2020 | Copyright Spectrum Floors September 2020 |  
This information is correct at the time of printing 01/09/2020 but the manufacturer reserves the right to carry out modification aimed at product improvement without notice.

NOTE : Due to manufacturing limitations there may be variations between the colors of actual flooring and samples images in this brochure.