

Premium Office Solutions

# SPECTRUM RUBBER FLOORING GRAIN

Value Engineered  
Flooring Systems

[spectrumfloors.com.au](http://spectrumfloors.com.au)

Phone : 1300 786 585

Email : [admin@spectrumfloors.com.au](mailto:admin@spectrumfloors.com.au)





**spectrum**  
quality commercial flooring

BRISBANE | SYDNEY | MELBOURNE | HOBART | ADELAIDE | PERTH

## PLAN SYSTEM | GRAIN

Smooth rubber surface with multicolored granules



610 x 610 mm  1.90 x 10 m  4.8 kg/m<sup>2</sup>

## TECH DATA

### 2 - 4mm Rubber Flooring



CHARACTERISTICS	REQUIREMENTS	GRAIN
WEIGHT		4.8 kg/m <sup>2</sup>
ROLL SIZE		1.90 m x 10 m
THICKNESS		3 mm
HARDNESS ISO 7619	≤ 75	90 ± 5 Shore A
RESIDUAL INDENTION EN 433	≤ 0.15 ≤ 0.20 ≤ 0.25	- 0.08 mm -
ABRASION RESISTANCE ISO 4649 (Met. A-5N)	≤ 250	160 mm <sup>3</sup>
DIMENSIONAL STABILITY EN 434	± 0.40 max	± 0.30 %
FLEXIBILITY EN 435 Met. A (Ø 20 MM)	NO FISSURING	COMPLY
COLOR FASTNESS TO ARTIFICIAL LIGHT ISO 105-B02 Met. 3	≥ 6 blue scale, ≥ 3 gray scale	COMPLY
CIGARETTE BURN EN 1399	Met. A ≥ 4 Met. B ≥ 3	COMPLY
FIRE RESISTANCE AS/ISO 9239-1	COMPLY	MEETS ALL BCA - NCC REQUIREMENTS
SLIP RESISTANCE AS4586-1999		> 0.30
STAIN RESISTANCE AS458619999		RESISTANT
ELECTROSTATIC CHARGE EN 1815		≤ 2 kV
REDUCTION OF SOUND TREADING ISO 10140-3		10 dB (approx.)
CASTOR CHAIRS EN 425		Suitable for Wheel castors "W" as stated in EN STANDARD 12529 2 pack adhesive is strongly recommended in high stress areas.

## Installation

Correct installation is an important part of a successful project. To facilitate the installation the underside of the flooring is sanded. All products should be installed in accordance with BS 8203-2001 and good trade practice. Detailed laying instructions and water based non toxic adhesive recommendations are available on request.

## Maintenance

Easy maintenance using environmentally safe materials to high European standards should be performed dependent on site conditions. Detailed cleaning instructions are available for each product on request.

Complimentary technical advice and sample service available | For local personal service phone call 1300 786 585  
Please inquire with your Spectrum representative to ensure material availability | Allow 8-10 weeks delivery

**HG 105**



**HG 106**




**HG 111**



**HG 114**




**HG 109**

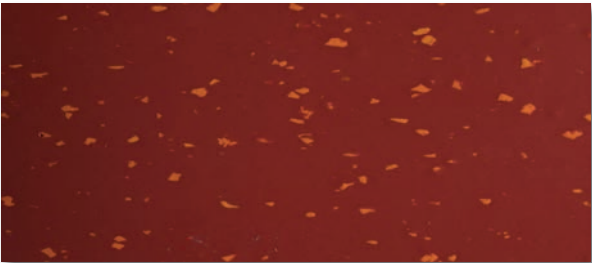


**HG 112**



**HG 110**

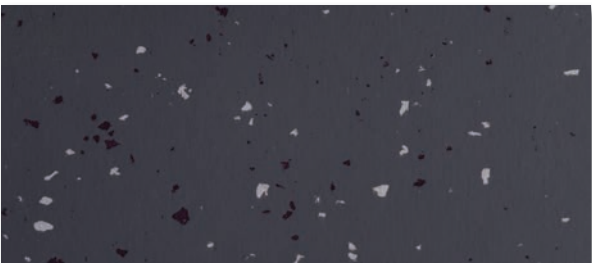


**HG 118**

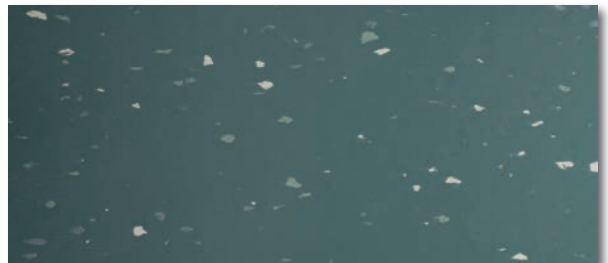

**HG 115**




**HG 120**

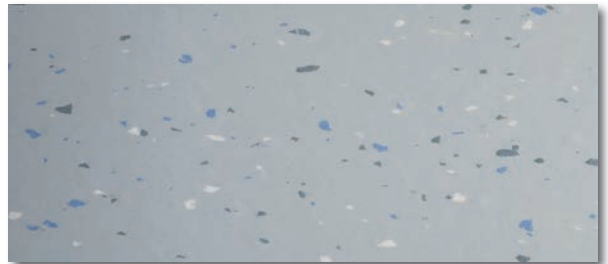

**HG 116**




**HG 103**

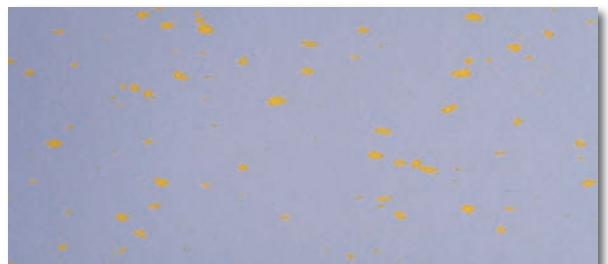



HG 113

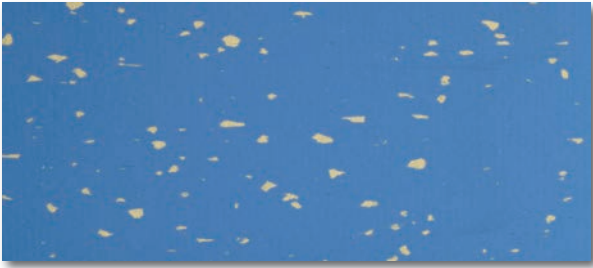


HG 117



HG 107




HG 121

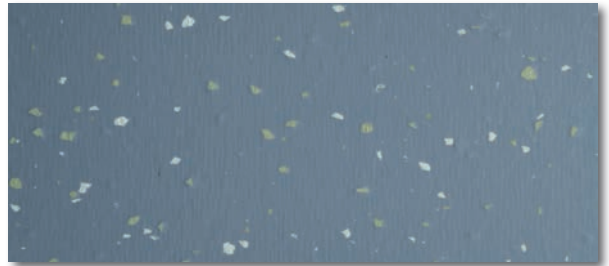

HG 100



HG 104

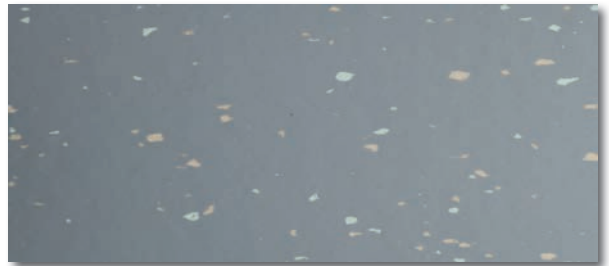

HG 123



HG 119




HG 101



HG 108



HG 102

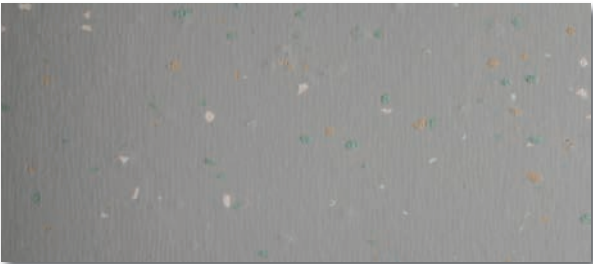

HG 122



For more information visit  
[spectrumfloors.com.au](https://spectrumfloors.com.au)

Head Office and Dispatch Center  
8 Selgar Avenue,  
TONSLEY South Australia 5042

Phone : 1300 786 585

Email : [admin@spectrumfloors.com.au](mailto:admin@spectrumfloors.com.au)



© Copyright September 2020 | Copyright Spectrum Floors September 2020 |  
This information is correct at the time of printing 01/09/2020 but the manufacturer reserves the right to carry out modification aimed at product improvement without notice.

NOTE : Due to manufacturing limitations there may be variations between the colors of actual flooring and samples images in this brochure.