

QANTM
CREATIVE MEDIA INSTITUTE

WORLD'S
LEADING
EDUCATOR
IN CREATIVE
MEDIA
INDUSTRIES

Premium Office Solutions

SPECTRUM RUBBER FLOORING SCREED

Value Engineered
Flooring Systems

spectrumfloors.com.au
Phone : 1300 786 585
Email : admin@spectrumfloors.com.au

 **spectrum**
quality commercial flooring

BRISBANE | SYDNEY | MELBOURNE | HOBART | ADELAIDE | PERTH

PLAN SYSTEM | **SCREED**

Smooth surface with colored concrete look



TECH DATA

2 - 4mm Rubber Flooring




CHARACTERISTICS	REQUIREMENTS	SCREED
WEIGHT		4.9 kg/m ²
ROLL SIZE		1.90 m x 10 m
THICKNESS		610 x 610 mm
HARDNESS ISO 7619	≤ 75	88 Shore A
RESIDUAL INDENTATION EN 433	≤ 0.15 ≤ 0.20 ≤ 0.25	0.08 mm
ABRASION RESISTANCE ISO 4649 (Met. A-5N)	≤ 250	165 mm ³
DIMENSIONAL STABILITY EN 434	± 0.40 max	± 0.30 %
FLEXIBILITY EN 435 Met. A (Ø 20 MM)	NO FISSURING	COMPLY
COLOR FASTNESS TO ARTIFICIAL LIGHT ISO 105-B02 Met. 3	≥ 6 blue scale, ≥ 3 gray scale	COMPLY
CIGARETTE BURN EN 1399	Met. A ≥ 4 Met. B ≥ 3	COMPLY
FIRE RESISTANCE AS/ISO 9239-1	COMPLY	Cfl-s1
SLIP RESISTANCE AS4586-1999		> 0.30
STAIN RESISTANCE AS458619999		RESISTANT
ELECTROSTATIC CHARGE EN 1815		≤ 2 kV
REDUCTION OF SOUND TREADING ISO 10140-3		Up to 10 dB (approx.)
CASTOR CHAIRS EN 425		Suitable for Wheel castors "W" as stated in EN STANDARD 12529 2 pack adhesive is strongly recommended in high stress areas.

Installation | Correct installation is an important part of a successful project. To facilitate the installation the underside of the flooring is sanded. All products should be installed in accordance with BS 8203-2001 and good trade practice. Detailed laying instructions and water based non toxic adhesive

Maintenance | Easy maintenance using environmentally safe materials to high European standards should be performed dependent on site conditions. Detailed cleaning instructions are available for each product on request.

S01 IVORY

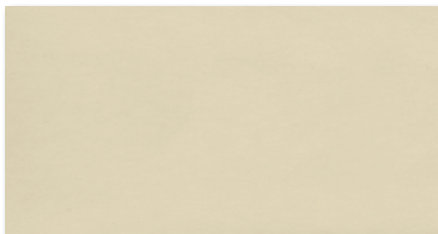

S02 ANTIQUE



S03 GREIGE



S04 HAZE



S05 CEMENT



S06 CHARCOAL



Complimentary technical advice and sample service available | For local personal service phone call 1300 786 585
Please inquire with your Spectrum representative to ensure material availability | Allow 8-10 weeks delivery

For more information visit
spectrumfloors.com.au

Head Office and Dispatch Center
8 Selgar Avenue,
TONSLEY South Australia 5042

Phone : 1300 786 585

Email : admin@spectrumfloors.com.au



© Copyright September 2020 | Copyright Spectrum Floors September 2020 |
This information is correct at the time of printing 01/09/2020 but the manufacturer reserves the right to carry out modification aimed at product improvement without notice.

NOTE : Due to manufacturing limitations there may be variations between the colors of actual flooring and samples images in this brochure.