

**ATTAR TEST REPORT NUMBER: 14/8259.6**

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.
Accredited for compliance with ISO/IEC 17025.
Accreditation Number: 2735

22 September 2014

Total Pages: 2**WET PENDULUM SLIP RESISTANCE**

Job No: M14/8259

Prepared for:	Spectrum Floors (Aust) Pty Ltd 8 Segar Avenue CLOVELLY PARK SA 5042					
Attention:	Brent Hack					
Test Site:	Test Slip Australia Pty Ltd, Beaumont Hills, NSW.					
Test Date:	18 September 2014					
Test Specimens, Size & Quantity:	Portal Plus Grey Softer fibre carpet, 150mm x 160mm, 5 off supplied.					
Sampling & Direction of Testing:	Sampling conducted by client. Tested parallel with the direction of manufacture. Refer to Figure 1.					
Test Personnel:	Clark Ahearn					
Preparation:	As received, without underlay.					
Fixed/Unfixed:	Fixed.					
Air Temperature:	21°C					
Test Equipment:	Wessex Skid Resistance Tester (Pendulum) Serial Number 1818, Calibrated 29/07/2014.					
Test Standard:	AS 4586: 2013 Slip resistance classification of new pedestrian surface materials – Appendix A.					
Slider Rubber:	Slider 96 Batch No. #54 prepared on P400 & 3µm lapping film.					
Classification Criteria:	Refer to Classification Criteria, attached as Appendix 1.					
British Pendulum Number	Specimen Number					SRV
	1	2	3	4	5	
	64	75	64	68	67	68
Classification:	P5- Surface tested dry					

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance procedures and wear on their slip-resistance be checked.

NOTE: Any specimens supplied will be disposed of in two (2) months time, unless otherwise instructed.

ATTAR

Marcus Braché
Senior Engineering Technician
Approved Signatory

This report may not be reproduced except in its entirety.

Page 1 of 2

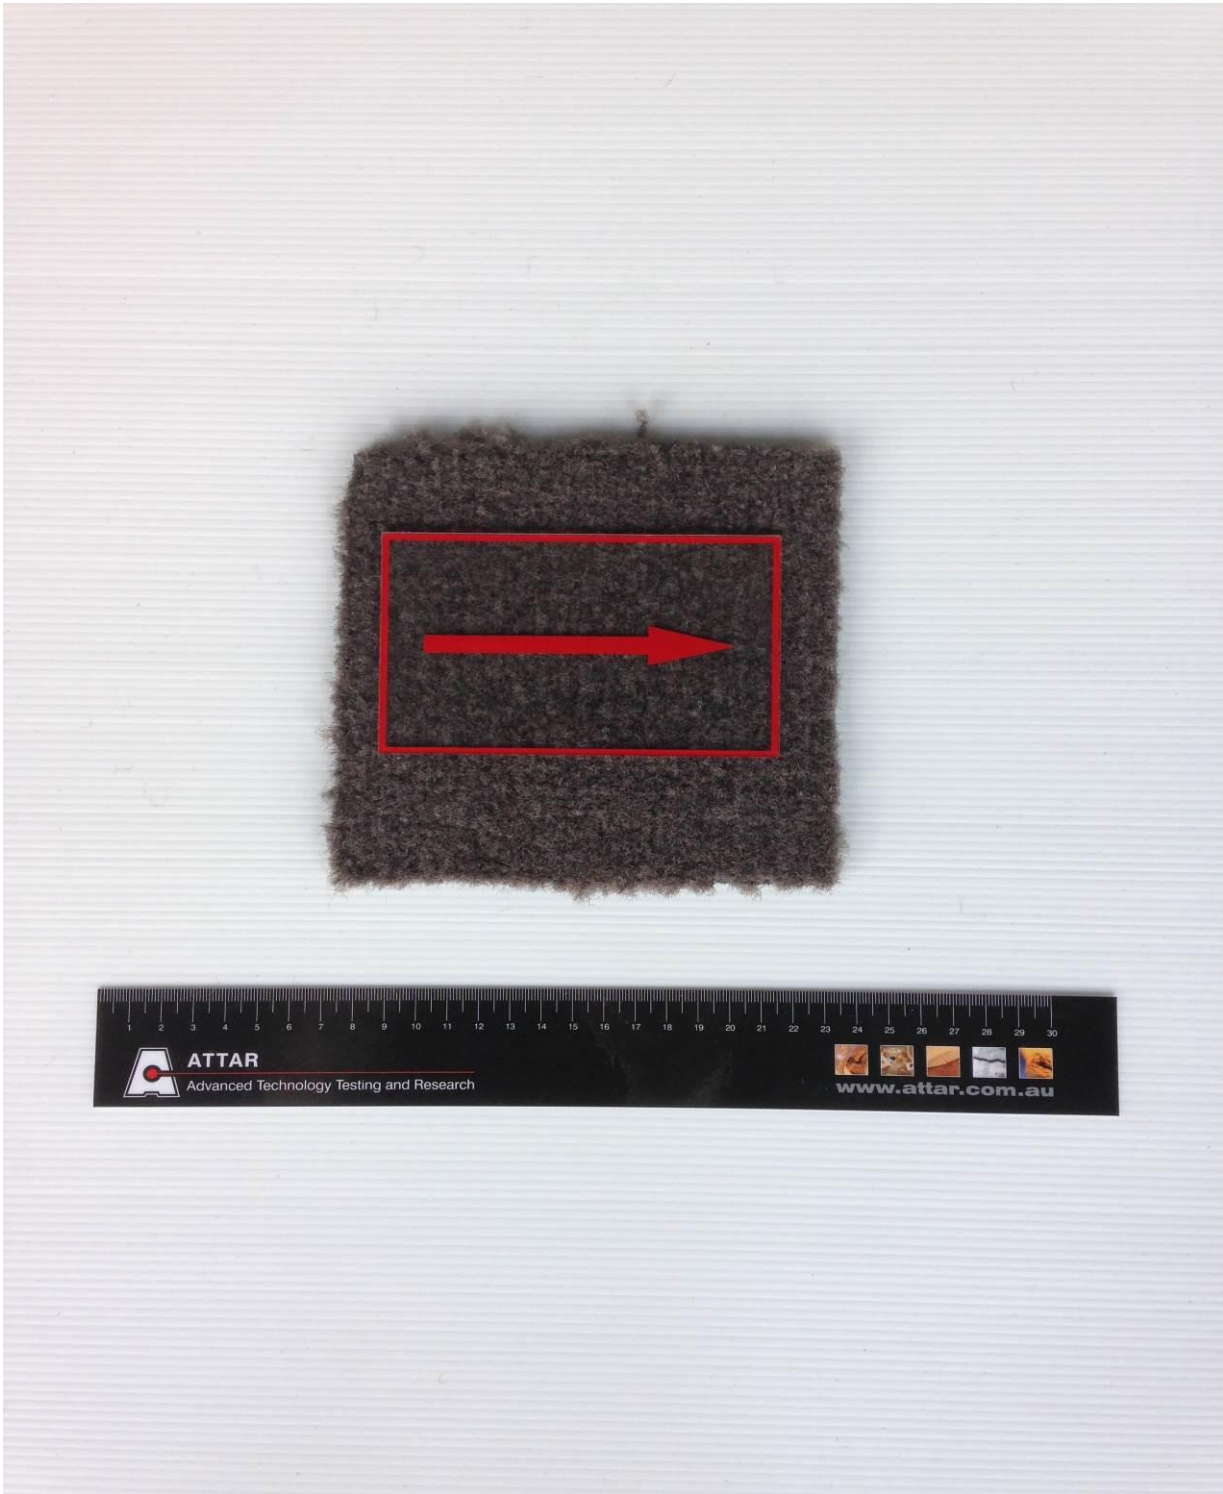


Figure 1: Portal Plus Grey softer fibre – Highlighted area indicates area tested and direction of test.